



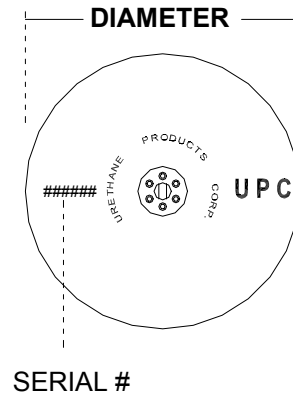



MARINE GUARD™ Foam Filled Fenders

3.0 ft (0.9 m) Diameter x 8.0 ft (2.4 m) Long

Standard Capacity

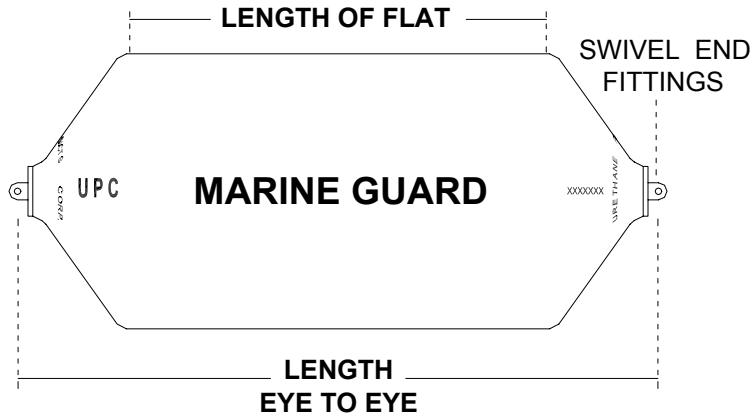

3.0 Ft. DIAMETER x 8.0 Ft. LONG	English	Metric
PERFORMANCE* (AT 60% COMPRESSION)		
Energy absorption, ft-kip (ton-m)	55	7.6
Reaction force, kip (ton)	68	31
DIMENSIONS AND WEIGHT		
Diameter, ft (m)	3.0	0.9
Length eye-to-eye, ft (m)	8.0	2.4
Length of flat, ft (m)	5.2	1.6
Skin thickness, in (mm)	0.75	19
Weight, lb. (kg)	560	255
Cube, ft ³ (m ³)	80	2.3
TECHNICAL DATA		
Standoff distance:		
Maximum, ft (m)	3.0	0.9
At 60% compression, ft (m)	1.2	0.4
Safe working end-pull load, kip (kN)	17	76
FOOTPRINT (AT 60% COMPRESSION)		
Maximum width, ft (m)	3.8	1.2
Maximum length, ft (m)	6.7	2.0
Area, ft ² (m ²)	18.9	1.8
RECOMMENDED SIZES OF MOUNTING HARDWARE		
Chain, in (mm)	1.00	25
Shackles, in (mm)	1.00	25
Swivels, in (mm)	1.00	25

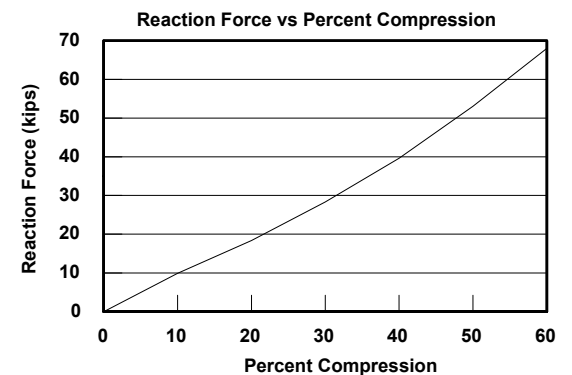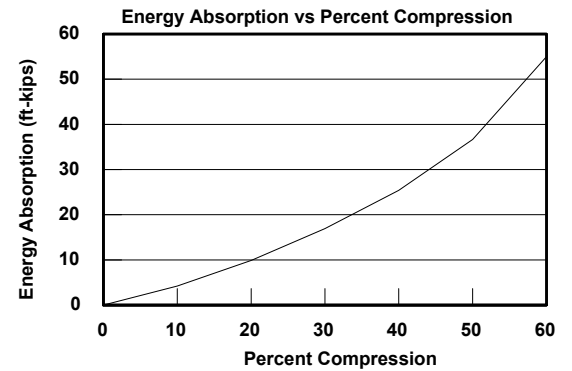

*Above information is for our Standard Capacity *Marine Guard*™ foam filled marine fenders. Actual values for all sizes may vary plus or minus 15% from stated values due to variations in material properties, dimensional tolerances, temperature and speed of compression.

Urethane Products Corporation • 17842 Sampson Ln. • Huntington • California • 92647 • USA
 Telephones 1-800-913-0062 • 714-375-4982 • Fax • 714-375-4904