



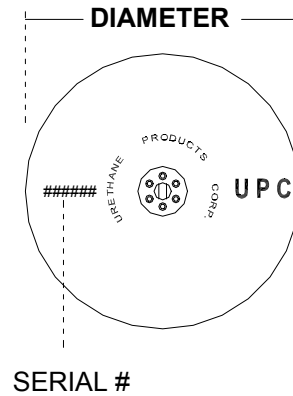



MARINE GUARD™ Foam Filled Fenders

5.0 ft (1.5 m) Diameter x 10.0 ft (3.0 m) Long

Standard Capacity

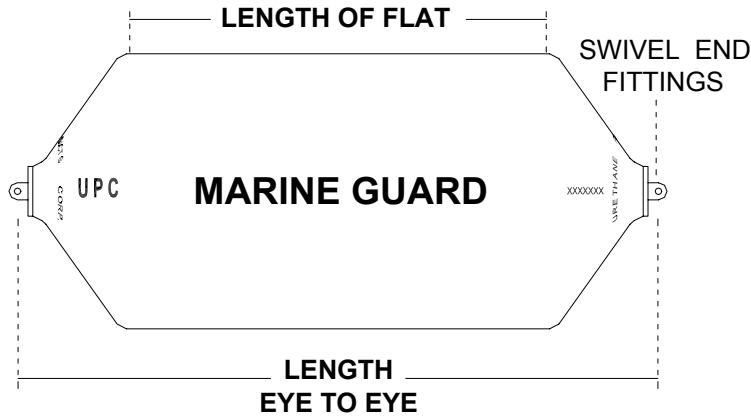

5.0 Ft. DIAMETER x 10.0 Ft. LONG	English	Metric
PERFORMANCE* (AT 60% COMPRESSION)		
Energy absorption, ft-kip (ton-m)	180	25
Reaction force, kip (ton)	134	61
DIMENSIONS AND WEIGHT		
Diameter, ft (m)	5.0	1.5
Length eye-to-eye, ft (m)	10.0	3.0
Length of flat, ft (m)	6.1	1.9
Skin thickness, in (mm)	1.0	25
Weight, lb. (kg)	1,500	680
Cube, ft ³ (m ³)	276	7.8
TECHNICAL DATA		
Standoff distance:		
Maximum, ft (m)	5.0	1.5
At 60% compression, ft (m)	2.0	0.6
Safe working end-pull load, kip (kN)	24	107
FOOTPRINT (AT 60% COMPRESSION)		
Maximum width, ft (m)	6.3	1.9
Maximum length, ft (m)	7.8	2.4
Area, ft ² (m ²)	37.2	3.5
RECOMMENDED SIZES OF MOUNTING HARDWARE		
Chain, in (mm)	1.25	32
Shackles, in (mm)	1.25	32
Swivels, in (mm)	1.25	32

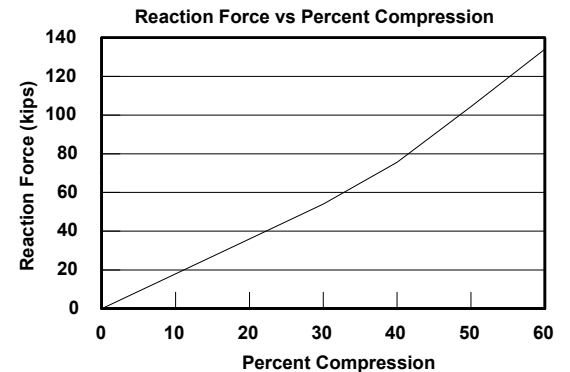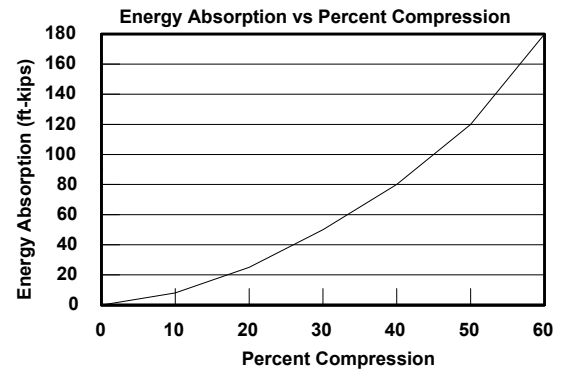

*Above information is for our Standard Capacity *Marine Guard*™ foam filled marine fenders. Actual values for all sizes may vary plus or minus 15% from stated values due to variations in material properties, dimensional tolerances, temperature and speed of compression.