



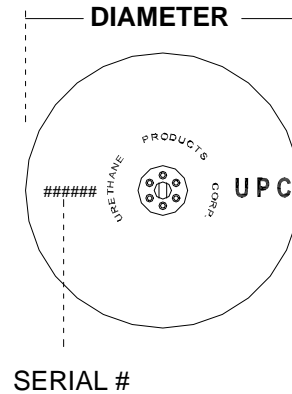



MARINE GUARD™ Foam Filled Fenders

9.0 ft (2.7 m) Diameter x 18.0 ft (5.5 m) Long

Standard Capacity

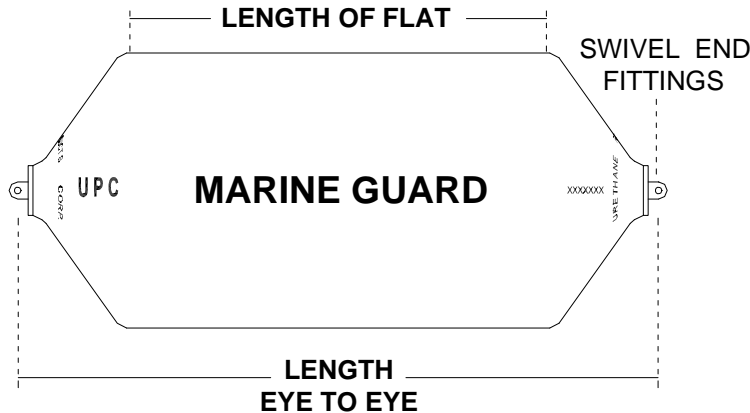

9.0 Ft. DIAMETER x 18.0 Ft. LONG	English	Metric
PERFORMANCE* (AT 60% COMPRESSION)		
Energy absorption, ft-kip (ton-m)	1,032	143
Reaction force, kip (ton)	427	194
DIMENSIONS AND WEIGHT		
Diameter, ft (m)	9.0	2.7
Length eye-to-eye, ft (m)	18.0	5.5
Length of flat, ft (m)	11.5	3.5
Skin thickness, in (mm)	1.38	35
Weight, lb. (kg)	7,250	3,280
Cube, ft ³ (m ³)	1,540	44
TECHNICAL DATA		
Standoff distance:		
Maximum, ft (m)	9.0	2.7
At 60% compression, ft (m)	3.6	1.1
Safe working end-pull load, kip (kN)	70	311
FOOTPRINT (AT 60% COMPRESSION)		
Maximum width, ft (m)	11.3	3.4
Maximum length, ft (m)	13.7	4.2
Area, ft ² (m ²)	118.6	11.0
RECOMMENDED SIZES OF MOUNTING HARDWARE		
Chain, in (mm)	2.00	51
Shackles, in (mm)	2.00	51
Swivels, in (mm)	2.00	51

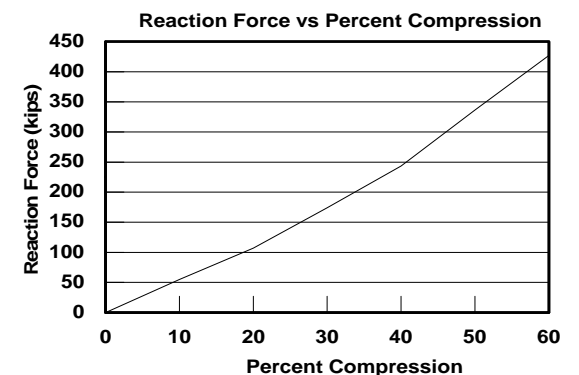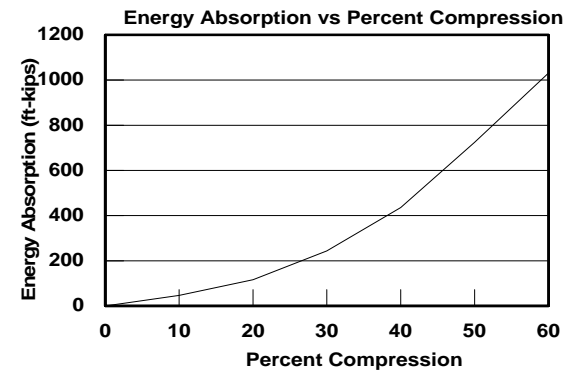

*Above information is for our Standard Capacity *Marine Guard*™ foam filled marine fenders. Actual values for all sizes may vary plus or minus 15% from stated values due to variations in material properties, dimensional tolerances, temperature and speed of compression.