



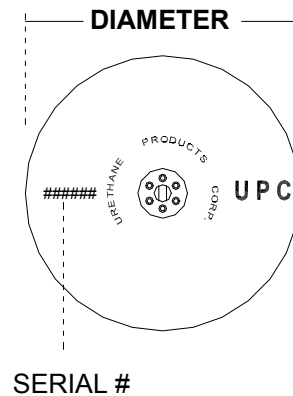



# MARINE GUARD™ Foam Filled Fenders

## 9.0 ft (2.7 m) Diameter x 20.0 ft (6.1 m) Long

### Standard Capacity

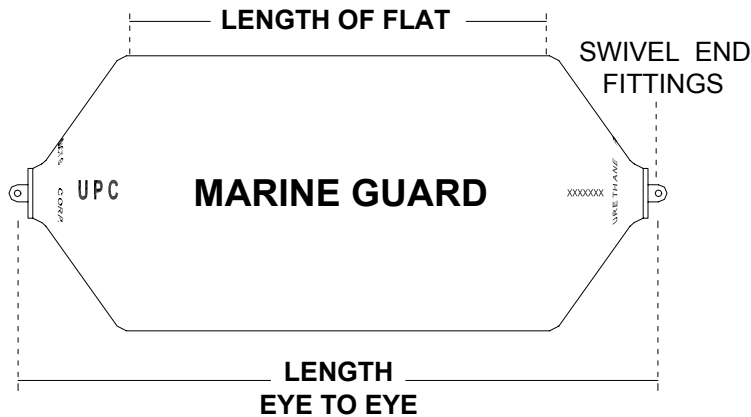

9.0 Ft. DIAMETER x 20.0 Ft. LONG	English	Metric
<b>PERFORMANCE* (AT 60% COMPRESSION)</b>		
Energy absorption, ft-kip (ton-m)	1,175	163
Reaction force, kip (ton)	486	220
<b>DIMENSIONS AND WEIGHT</b>		
Diameter, ft (m)	9.0	2.7
Length eye-to-eye, ft (m)	20.0	6.1
Length of flat, ft (m)	13.5	4.1
Skin thickness, in (mm)	1.50	38
Weight, lb. (kg)	8,880	4,025
Cube, ft <sup>3</sup> (m <sup>3</sup> )	1,710	48
<b>TECHNICAL DATA</b>		
Standoff distance:		
Maximum, ft (m)	9.0	2.7
At 60% compression, ft (m)	3.6	1.1
Safe working end-pull load, kip (kN)	110	489
<b>FOOTPRINT (AT 60% COMPRESSION)</b>		
Maximum width, ft (m)	11.3	3.4
Maximum length, ft (m)	15.7	4.8
Area, ft <sup>2</sup> (m <sup>2</sup> )	134.6	12.5
<b>RECOMMENDED SIZES OF MOUNTING HARDWARE</b>		
Chain, in (mm)	2.50	64
Shackles, in (mm)	2.50	64
Swivels, in (mm)	2.50	64

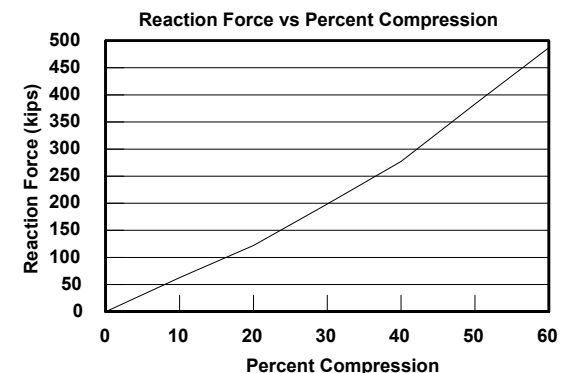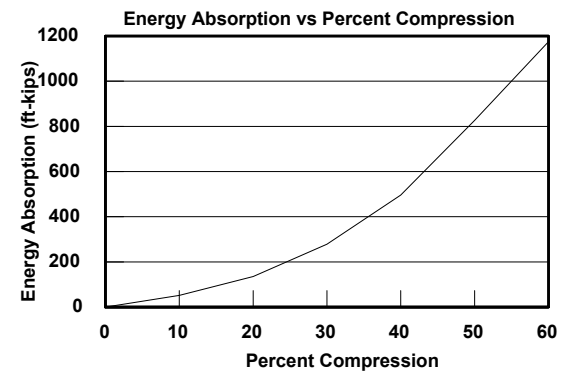

\*Above information is for our Standard Capacity *Marine Guard*™ foam filled marine fenders. Actual values for all sizes may vary plus or minus 15% from stated values due to variations in material properties, dimensional tolerances, temperature and speed of compression.